




ATENA 130

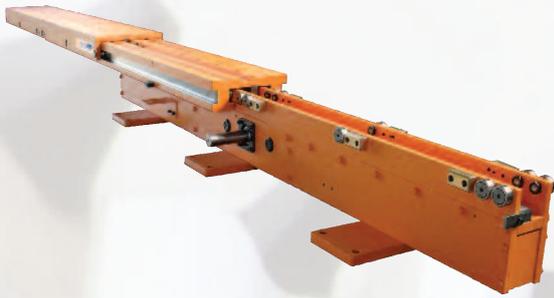

Being fit for special applications, the ATENA 130 allows handling heavy loads with long strokes and small bending. Also the ATENA 130 has the possibility to be

installed upside down, for special purposes.

Not suitable for high operating speeds and accelerations, it works at its best in all those sectors where toughness, repeatability and fatigue stress are required.

As for the transmission, it's available both with racks and pinions and with chains.

PRODUCT CODE	Q LOAD (KG)	L FIXED BODY LENGTH (MM)	Ls UPPER SLIDE LENGTH (MM)	S1 STROKE (MM)	MAX BENDING UNDER LOAD (MM)
AT130-150	2000	1500	1500	1600	8
AT130-160		1600	1600	1700	9
AT130-170		1700	1700	1800	10
AT130-180		1800	1800	1900	11
AT130-190		1900	1900	2000	12
AT130-200		2000	2000	2100	15
AT130-220		2200	2200	2300	19
AT130-250		2500	2500	2600	25

The ATENA can be produced also in notably bigger sizes; nevertheless, it's part of the custom-built production and its feasibility has to be established along with LHD's technical staff.

